

Heli-Tie Helical Wall Tie

Material

Stainless Steel



Size

See the table below

Features and Benefits

- Can install in the face of brick or into the mortar bed joint
- Installs quickly and easily
- Provides an inconspicuous repair that helps preserve a building's appearance
- 316 Stainless Steel offers superior corrosion resistance when wall cavity exposure exists
- Patented manufacturing process enables easier driving and better interlock with the substrate
- Batch number printed on each tie for easy identification and inspection

Applications

- Repair of building facades




Batch number printed on each tie for **easy identification and inspection**



Patented manufacturing process enables **easier driving and better interlock** with the substrate

Scan this QR code to watch installation animation on Heli-Tie™ Helical Wall Tie.
<https://youtu.be/cGyrbZ2mxY>

Construction Details

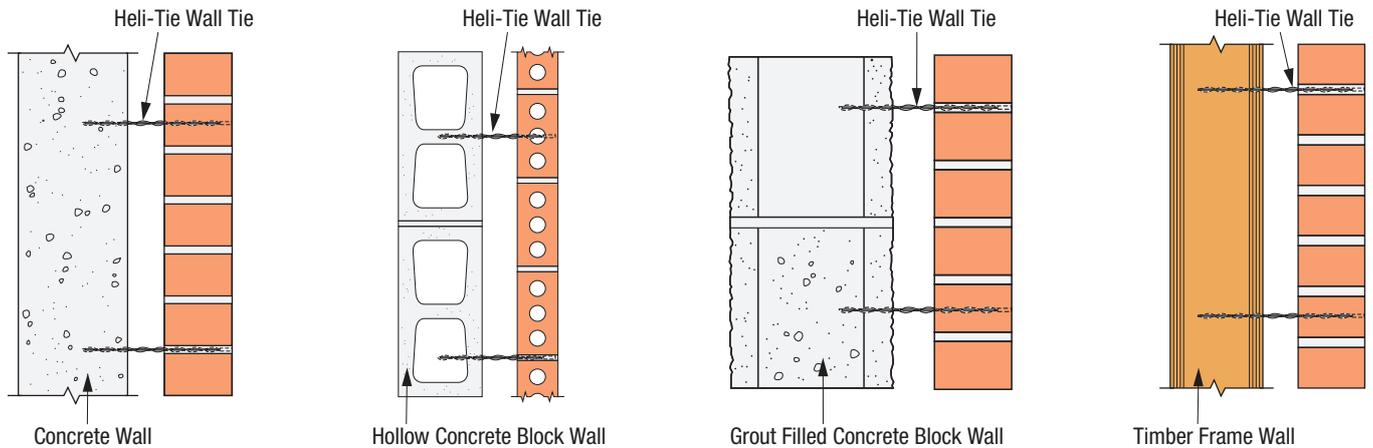

Specifications - Heli-Tie Helical Wall Tie

Model No.	Size (mm)	Drill Bit Dia.* (mm)	Material	Pack Qty
HELI09180A4	9 x 180	5.5 to 6.5	316 Stainless Steel	100
HELI09205A4	9 x 205			
HELI09230A4	9 x 230			
HELI09255A4	9 x 255			150
HELI09280A4	9 x 280			
HELI09305A4	9 x 305			
HELI09A2-X	9 x 10,000*		304 Stainless Steel	1

*Ties cannot be cut from 10m coils as they will be bent

Simpson Strong-Tie® (New Zealand) Ltd
Call **09 477 4440**
www.strongtie.co.nz

Simpson Strong-Tie® Australia Pty Ltd
Call **1300 STRONGTIE (1300 787 664)**
www.strongtie.com.au

Simpson Strong-Tie Limited Warranty: For the Limited Warranty that applies to Simpson Strong-Tie products, please consult www.strongtie.com.au/warranty or www.strongtie.co.nz/warranty. To obtain a copy of the Limited Warranty, contact us at info.au@strongtie.com or info.nz@strongtie.com, or at the number provided here. The Limited Warranty contains important disclaimers, limitations and exclusions, and applies only if the products have been properly specified, installed, maintained, and used in accordance with the design limits and the structural, technical, and environmental specifications in the Simpson Strong-Tie Documentation. All future purchases of Simpson Strong-Tie products are subject to the terms of the Limited Warranty in effect as of the purchase date. This flyer reflects information available as of May 2025 and may be updated periodically.

Heli-Tie Helical Wall Tie

Heli-Tie™ Helical Wall Tie Guide Tension Loads in Various Base Materials

Size (mm)	Base Material	Anchor Location	Drill Bit Dia.* (mm)	Min. Embed. Depth (mm)	Tension Load ¹				
					Ultimate ² (kN)	Standard Deviation (kN)	Characteristic (kN)	Load at Max. Permitted Displ. ³ (kN)	Coefficient of Variation
9.0	Solid Brick ⁴	Mortar Bed Joint	5.5	76	2.5	0.4	1.5	1.1	0.16
			6.5		1.6	0.2	1.1	0.6	0.13
		Brick Face	5.5		5.8	0.4	4.8	2.5	0.07
			6.5		3.6	0.3	2.8	1.6	0.08
	Hollow Brick ⁵	Mortar Bed Joint	5.5		2.4	0.4	1.4	1.3	0.17
			5.5		3.4	0.2	2.9	1.8	0.06
		6.5	2.3		0.1	2.0	0.8	0.04	
	Grout-Filled CMU ⁶	Centre of Face Shell	5.5		5.2	0.4	4.2	1.8	0.08
			6.5	3.7	0.3	2.9	1.6	0.08	
		Web	5.5	5.2	0.2	4.7	2.0	0.04	
			6.5	3.6	0.4	2.6	1.5	0.11	
		Mortar Bed Joint	5.5	3.2	0.3	2.4	1.4	0.09	
			6.5	2.4	0.3	1.6	0.9	0.13	
	Hollow CMU ⁷	Centre of Face Shell	5.5	3.5	0.2	3.0	1.4	0.06	
			6.5	2.2	0.2	1.7	1.1	0.09	
		Web	5.5	5.3	0.2	4.8	2.0	0.04	
			6.5	3.0	0.4	2.0	1.7	0.13	
	Normal-Weight Concrete ⁸	—	5.5	44	3.9	0.3	3.1	1.8	0.08
			6.5	70	4.4	0.4	3.4	1.7	0.09
	Timber Stud ^{9,11}	Centre of Thin Edge	5.5	70	2.6	0.1	2.3	1.6	0.04
6.5			2.0		0.0	2.0	1.2	0.00	
Steel Stud ^{10,11}	Centre of Flange	5.5	25	0.9	0.0	0.9	0.5	0.00	
		6.5		0.7	0.0	0.7	0.4	0.00	



CAUTION: Loads are guide values based on laboratory testing. On-site testing shall be performed for verification of capacity since base material quality can vary widely.

- Tabulated loads are guide values based on laboratory testing. On-site testing shall be performed for verification of capacity since base material quality can vary widely.
- Ultimate load is average load at failure of the base material. Heli Tie™ fastener average ultimate steel strength is 17.3 kN and does not govern.
- Load at maximum permitted displacement is average load at displacement of 4 mm. The designer shall apply a suitable factor of safety to these numbers to derive allowable service loads.
- Solid brick values for nominal 100 mm wide solid brick conforming to ASTM C62/C216, Grade SW. Type N mortar is prepared in accordance with IBC Section 2103.8.
- Hollow brick values for nominal 100 mm wide hollow brick conforming to ASTM C216/C652, Grade SW, Type HBS, Class H40V. Mortar is prepared in accordance with IBC Section 2103.8.
- Grout-filled CMU values for 200 mm wide lightweight, medium-weight and normal-weight concrete masonry units. The masonry units must be fully grouted. Values for 200 mm wide concrete masonry units (CMU) with a minimum specified compressive strength of masonry, f'm, at 28 days is 10.34 MPa.
- Hollow CMU values for 200 mm wide lightweight, medium-weight and normal-weight concrete masonry units.
- Normal-weight concrete values for concrete with minimum specified compressive strength of 17.24 MPa.
- 90 mm x 45 mm timber stud values for nominal 90 mm x 45 mm Spruce-Pine-Fir or Radiata Pine.
- Steel stud values for 20-gauge C-shape steel stud.
- For new construction. Anchor one end of tie into backup material. Embed other end into veneer mortar joint. Not for retrofits due to difficulty of locating centre of timber or steel stud flange.

*When selecting drill bit, 5.5 mm equates to " and 6.5 mm equates to 1/4" imperial sized bit.

Heli-Tie™ Helical Wall Tie Compression (Buckling) Loads

Size (mm)	Unsupported Length (mm)	Ultimate Compression Load ¹ (kN)
9.0	25	8.5
	50	5.8
	100	4.4
	150	3.5

- The Designer shall apply a suitable factor of safety to these values to derive allowable service loads.