

Strong-Drive® SDWS16 FRAMING & BATTEN

Multipurpose Structural Wood Screw



Higher shear and withdrawal capacity than that of a No.14 Bugle Batten screw*

*Testing of SDWS16 into softwood (JD5) vs No14 screw capacities given in AS1720.1 – 2010.

Superior to nails in holding power and pullout resistance

SDWS16 FRAMING & BATTEN Screw

The SDWS16 screw is suitable for replacing nails in many framing applications where you are wanting a more secure and precise connection, especially if you require greater holding power and pullout resistance, it can also be easily removed if required.

The screw has a SawTooth™ point that makes for fast installations without predrilling, and its specially designed head countersinks easily to provide a clean, flush finish. The T25 bit holds the 6-lobe recess tightly, reducing cam-out and head stripping.

Features and Benefits


- Large washer head with underhead box-nibs provides increased bearing in structural applications and provides clean and easy countersinking (11 mm head dia.)
- SawTooth™ point ensures fast starts, reduces installation torque and eliminates the need for predrilling in most applications
- The 6-lobe drive provides positive bit engagement resulting in easier installations and longer bit life

Applications

- Multipurpose timber-to-timber connections, including timber framing, indoor/outdoor projects
- Beam Construction (laminating timber members)
- Framing Connections
- Joist or Rafter Connections
- Purlin to Rafter/Truss Connections
- Timber Battens
- Fence Rails and Capping

Material and Finish

- Quik Guard® Coating — Quik Guard is a proprietary coating that consists of an electroplated zinc base layer and a system of organic top coats. It provides corrosion resistance equivalent to hot-dip galvanisation.

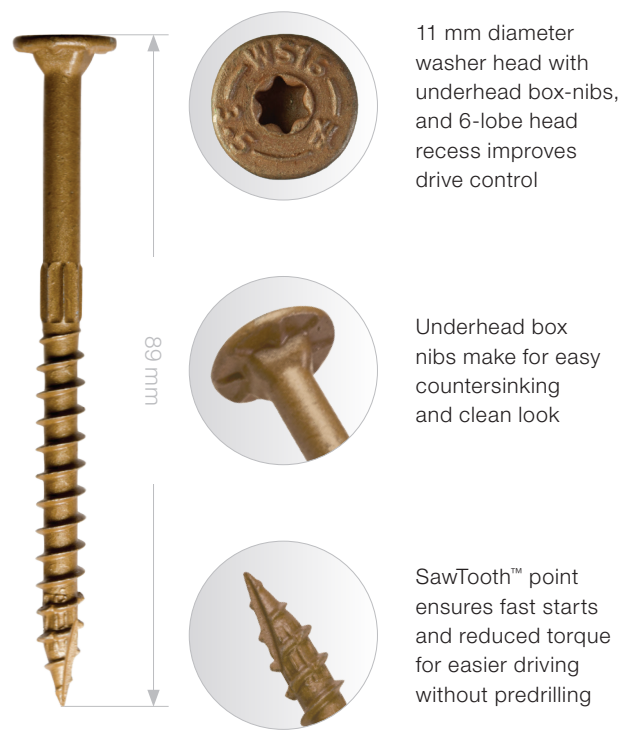

11 mm diameter washer head with underhead box-nibs, and 6-lobe head recess improves drive control

Underhead box nibs make for easy countersinking and clean look

SawTooth™ point ensures fast starts and reduced torque for easier driving without predrilling



Premium colour-coded T25 driver bit included with SDWS16



Strong-Drive® SDWS16 FRAMING & BATTEN

Multipurpose Structural Wood Screw



Product Information

Model No.	Screw Length (mm)	Thread Length (mm)	Head Dia. (mm)	Diameter (mm)			Drive Type	Box Qty	Box/ Ctn	Pack Barcode	Pack Dims (W x L x H) and weight
				Shank	Major	Minor				Carton Barcode	Carton Dims (W x L x H) and weight
SDWS16312QR50	89	51	11.2	4.0	5.5	3.7	T25 6-lobe	50	10	707392010395	98 x 76 x 76 mm, 0.49 kg
										10707392010392	104 x 396 x 160 mm, 4.99 kg



SDWS16312QR50
89mm (3 1/2")
Qty 50